US008031878B2

(12) **United States Patent**
Gauger, Jr. et al.

(10) **Patent No.: US 8,031,878 B2**
(45) **Date of Patent: Oct. 4, 2011**

(54) **ELECTRONIC INTERFACING WITH A HEAD-MOUNTED DEVICE**

(75) Inventors: **Daniel M. Gauger, Jr.**, Cambridge, MA (US); **Roman Sapiejewski**, Boston, MA (US)

(73) Assignee: **Bose Corporation**

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1423 days.

(21) Appl. No.: **11/191,873**

(22) Filed: **Jul. 28, 2005**

(65) **Prior Publication Data**

US 2007/0025561 A1 Feb. 1, 2007

(51) **Int. Cl.**

H04R 1/10	(2006.01)
H04R 25/00	(2006.01)
H04R 5/02	(2006.01)
A61F 11/06	(2006.01)
H04M 1/00	(2006.01)

(52) **U.S. Cl.** **381/74**; 381/72; 381/71.6; 381/370; 381/311; 455/569.1

(58) **Field of Classification Search** 381/74, 381/72, 71.6, 370, 311; 455/345, 297, 569.1
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,604,813	A	2/1997	Evans et al.	
5,765,134	A	6/1998	Kehoe	
5,787,180	A	7/1998	Hall et al.	
5,825,897	A	10/1998	Andrea et al.	
5,951,141	A	9/1999	Bradley	
5,978,689	A	11/1999	Tuoriniemi et al.	
5,991,637	A	11/1999	Mack, II et al.	
6,061,456	A	5/2000	Andrea et al.	
6,108,415	A	8/2000	Andrea	
6,415,034	B1 *	7/2002	Hietanen	381/71.6
6,445,799	B1	9/2002	Taenzer et al.	
6,507,650	B1	1/2003	Moquin	
6,735,316	B1 *	5/2004	Wurtz	381/74
6,873,862	B2	3/2005	Reshefsky	
6,975,984	B2	12/2005	MacAuslan et al.	
7,058,182	B2	6/2006	Kates	
7,110,800	B2	9/2006	Nagayasu et al.	
7,155,214	B2	12/2006	Struthers et al.	
7,181,233	B2	2/2007	Fry	

(Continued)

FOREIGN PATENT DOCUMENTS

DE 20 2006 004625 6/2006

(Continued)

OTHER PUBLICATIONS

http://www.uflymike.com/index.html, pp. 1-2, Downloaded Apr. 18, 2005.

(Continued)

Primary Examiner — Devona Faulk

(57) **ABSTRACT**

Power is delivered from a power source in a head-mounted device to a separate accessory that is coupled to the head-mounted device. Power and signals are delivered on a common conductor that couples the head-mounted device to an accessory. One or both of the head-mounted device and the accessory are configured based on the signals. Power may be received at an accessory from the head-mounted device through a dedicated power conductor. Power may be delivered from a power source in a portable accessory to a head-mounted device that is coupled to the portable accessory and uses the power for circuitry in the head-mounted device that delivers audio to a user.

39 Claims, 6 Drawing Sheets

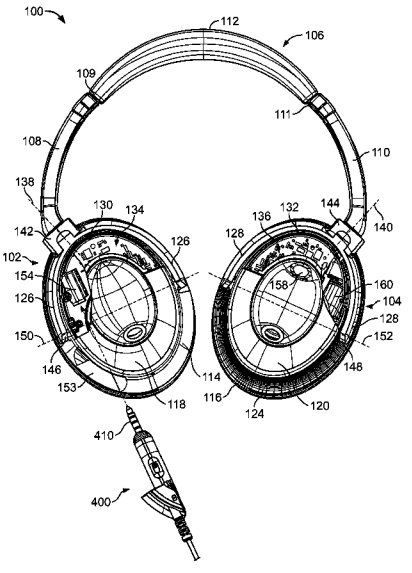

U.S. PATENT DOCUMENTS

7,187,948	B2	3/2007	Alden	
7,190,797	B1	3/2007	Johnston et al.	
7,215,766	B2	5/2007	Wurtz	
7,251,332	B2	7/2007	Eves et al.	
7,254,420	B1	8/2007	Klein	
7,292,880	B2	11/2007	Lehtonen et al.	
7,346,176	B1	3/2008	Bernardi et al.	
7,395,090	B2	7/2008	Alden	
7,433,715	B2	10/2008	Buckley et al.	
7,627,352	B2	12/2009	Gauger, Jr. et al.	
7,720,232	B2	5/2010	Oxford	
2001/0050991	A1	12/2001	Eves	
2001/0050993	A1	12/2001	Douglas	
2001/0053228	A1	12/2001	Jones	
2002/0003889	A1 *	1/2002	Fischer	381/370
2002/0102005	A1	8/2002	Lin	
2004/0136522	A1	7/2004	Wurtz	
2004/0198436	A1	10/2004	Alden	
2004/0204185	A1	10/2004	Snyder et al.	
2005/0004796	A1	1/2005	Trump et al.	
2005/0064915	A1	3/2005	Lair	
2005/0090295	A1	4/2005	Ali et al.	
2005/0130697	A1	6/2005	Dyer	
2005/0146227	A1	7/2005	Jackson et al.	
2005/0177365	A1	8/2005	Ikeda	
2005/0181826	A1	8/2005	Yueh	
2005/0232448	A1	10/2005	Kung	
2005/0239434	A1	10/2005	Marlowe	
2006/0013410	A1	1/2006	Wurtz	
2006/0046656	A1	3/2006	Yang	
2006/0046778	A1	3/2006	Hembree	
2006/0134959	A1	6/2006	Ellenbogen	
2006/0166705	A1	7/2006	Seshadri et al.	
2006/0193479	A1	8/2006	Harvey et al.	
2007/0015486	A1	1/2007	Marlowe	
2007/0025561	A1	2/2007	Gauger et al.	
2007/0036384	A1	2/2007	Struthers et al.	
2007/0041582	A1	2/2007	Lam	
2007/0082612	A1	4/2007	Valve et al.	
2007/0127747	A1	6/2007	Doyle	
2007/0184881	A1	8/2007	Wahl et al.	
2007/0225035	A1	9/2007	Gauger et al.	
2007/0226384	A1	9/2007	Robbin et al.	
2007/0239849	A1	10/2007	Robbin et al.	
2007/0247794	A1	10/2007	Jaffe et al.	
2007/0291953	A1	12/2007	Ngia et al.	
2008/0032752	A1	2/2008	Tamura	
2008/0101638	A1	5/2008	Ziller	
2008/0167092	A1	7/2008	Ueda et al.	
2008/0187160	A1	8/2008	Kim	
2008/0201138	A1	8/2008	Visser et al.	

FOREIGN PATENT DOCUMENTS

EP	0583900		2/1994
EP	1091543		4/2001
EP	1608202		12/2005
GB	234308		5/1925
GB	2 272 129	A	5/1994
GB	2343080		4/2000
JP	2000224683	A	8/2000
JP	2001016679	A	1/2001
JP	2001100794	A	4/2001
JP	2001103355	A	4/2001
WO	WO 00/10362		2/2000
WO	WO 00/38044		6/2000
WO	0203746		1/2002
WO	WO 02/01910		1/2002
WO	WO 0201910	A2 *	1/2002
WO	WO 2004/080123		9/2004
WO	2005029825		3/2005
WO	2006129205		12/2006
WO	WO 2006/130115		12/2006
WO	WO 2007/031703		3/2007
WO	WO 2007/049075		3/2007

OTHER PUBLICATIONS

The Bose Avidation Headset X Owner's Guide, Version AM270261_00V.pdf, Mav 16 2003.

The Bose QuietComfort Acoustic Noise Cancelling Headphones Guide, Version AM257565_00_V.pdf, May 13, 2003.

Combat Vehicle Crewman Headset Brochure Bose Corporation 2000.

Combat Vhicle Crewman Headset Parts List Bose Corporation 1998.

International Search Report and Written Opinion in Application No. PCT/US2008/050216, dated Sep. 4, 2008.

Tekkeon, myTalker Compatibility, http://www.tekkeon.com/site/products-mytalker.compat.php, downloaded Jan. 24, 2006. Site Copyright 2004, 2005, Publication date unknown. <http://www.tekkeon.com/site/products-mytalker-ompat.php>.

Tekkeon, myTalker Tech Specs, http://www.tekkeon.com/site/products-mytalker-specs.php, downloaded Jan. 24, 2006, Site Copyright 2004, 2005, Publication date unknown. <http://www.tekkeon.com/site/products-mytalker-specs.php>.

Tekkeon, myTalker Features, http:www.tekkeon.com/site/products-mytalker-features.php, downloaded Jan. 24, 2006, Site Copyright 2004, 2005, Publication date unknown.

Tekkeon, myTalker Bluetooth Gateway for iPod and MP3 Players Data Sheet, Copyright 2006, Site Copyright 2004, 2005, Publication date unknown.

Hardware Zone, Tekkeon Enables Mobile Phone Calls Using iPod/MP3 Headphones, San Francisco, MacWorld, Jan. 10, 2006. http://www.hardwarezone.com/news/view.php?id3523&cid=2&src=rss, downloaded Jan. 24, 2006.

TreoCentral.com SkullCandy headset? pp. 1-3, http://discuss.treocentral.com/archive/index.php/t-33954.html, downloaded Nov. 3, 2005, Publication date unknown. <http://discuss.treocentral.com/archive/index.php/t-33954.html>.

Amazon.com: Electronics: Skullcandy SCE-3B Skullcandy Earbud with 3-Barrel Universal Cell Phone Connector, p. 1 of 1, http//www.amazon.com/gp/product/B00009WE3O/sr=1-18/qid=1131032711/ref=sr_1_18/102-71..., downloaded Nov. 3, 2005, Publication date unknown.

Amazon.com: Electronics: Skullcandy SCE-3B Skullcandy Backphones with 3-Barrel Universal Cell Phone Connector, p. 1 of 2, http//www.amazon.com/gp/product/B00009WE3M/102-7181297-1030518?v=glance&n=172282..., downloaded Nov. 3, 2005, Publication date unknown.

Bluetake i-Phone BT420EX Bluetooth Hi-Fi Sports Headphone Kit; Bluetake Bringing Enhanced enjoyment ; from website: www.bluetake.com/products/BT420EX/BT420EXsubS.htm (Nov. 3, 2005).

Bluetake Technology BT420, Bluetooth, Hi-Fi Sports Headphone, Copyright 2004. www.bluetake.com., Publication date unknown. <http://www.bluetake.com/>.

BlueTake BT420ex Bluetooth Stereo Headset, pp. 1 of 2, http//www.behandsfree.com/ProductInfo.aspx?productid=WHEAD1014, downloaded Nov. 3, 2005, Publication date unknown.

Anonymous, "Combining telephone capability with portable music devices", vol. 43, No. 665, Research Disclosure, Mason Publications (Mar. 2001).

"Bluetooth Wireless Stereo Solutions, User Manual (GBMA201, GBMH201, GBMHKIT)," IOGEAR, Copyright 2005 (retrieved on May 26, 2008), retrieved from the Internet: <URL:http://www.iogear.com/support/dm/manual/GBMH201#display>.

"Blueye Cyclops Bluetooth Stereo Headphone," Philippines Hardware Zone, Jan. 29, 2006 (retrieved on May 26, 2008), retrieved from the Internet: <URL:http://ph.hardwarezone.com/news/view.php?cid=8&id=3526>.

Invitation to Pay Additional Fees dated Jun. 6, 2008 from International Application PCT/US2008/050216.

Amazon.com: Electronics: Skullcandy SCE-N4 Skullcandy Earbud For Nokia; 4-Barrel 2.5 MM Pin . . . p. 1 of 1, http//www.amazon.com/gp/product/tech-data/B00009WE3P/ref=dp_nav_0/102*7181297-103051..., downloaded Nov. 3, 2005, Publication date unknown.

Skullcandy, Portable Link User's Guide, pp. 1-2, http://www.skullcandy.com/manuals/LinkUserGuide.pdf, downloaded Nov. 11, 2005.
http:/lwww.uflymike.com/index.htm, pp. 1-2, Downloaded Apr. 18, 2005. <http://www.uflymike.com/index.htm>.
The Bose Aviation Headset X Owner's Guide, Version AM270261_OOV.pdf, May 16, 2003.
The Bose QuietComfort Acoustic Noise Cancelling Headphones Guide, Version AM257565 00 V.odf, May 13, 2003.
Combat Vehicle Crewman Headset Parts List Bose Corporation 1998.
Skullcandy SCE-3B Skullcandy Earbud With 3-Barrel Universal Cellphone Connector; from website: Amazon.com: Electronics: Skullcandy SCE-3B Skullcandy Earbud; Nov. 3, 2005.
International Preliminary Report on Patentability dated Mar. 19, 2009 for Appl. No. PCT/US08/050216.
theBoom Quiet. http://www.theboom.com/ProductDetails.asp?ProductCode=571&Show=TechSpects downloaded Jan. 3, 2007.
Creative Worldwide Headset CB2455. http://www.creative.com/products/product.asp?category=437&subcategory=442&product downloaded Jan. 3, 2006.
Plantronics Pulsar 590A Bluetooth® Headset. http://www.headsetgenie.comlproduct info.php?cPath=8&productsid=318 downloaded Jan. 3, 2007.
Skullcandy SCB-3B Skullcandy Backphones With 3-Barrel Universal Cellphone Connector; from website: Amazon.com: Electronics: Skullcandy SCB-3B Skullcandy Backphones; Nov. 3, 2005 (2 pages).
Globeandmail.com; Skullcandy Link by Jack Kapica, from website: www.globetechnology.com/servlet/story/RTGAM.20031021.gtskullrevoct21; Nov. 3, 2005 (2 pages).
Certificate of Patent for Utility Model dated Mar. 3, 2010 for CN Patent No. ZL200890000013.7.
JP Office Action dated Jan. 26, 2010 for JP Appl. No. JPO2009-600045_000424.
JP Office Action dated Jan. 26, 2010 for JP Appl. No. JPO2009-600045_000425.
International Search Report and Written Opinion dated Aug. 16, 2007 for Appl. PCT/US07/064913.
International Preliminary Report on Patentability dated Mar. 10, 2008 for Appl. No. PCT/US07/064913.
AU Office Action dated Jun. 1, 2010 for AU Appln. No. 2008205121.
International Preliminary Report on Patentability dated May 12, 2007 for Appl. No. PCT/US06/028605.
International Search Report and Written Opinion dated Dec. 6, 2006 for Appl. No. PCT/US06/028605.
CN Notice of Grant dated Oct. 23, 2009 for CN Appl. No. 200890000013.7.

* cited by examiner

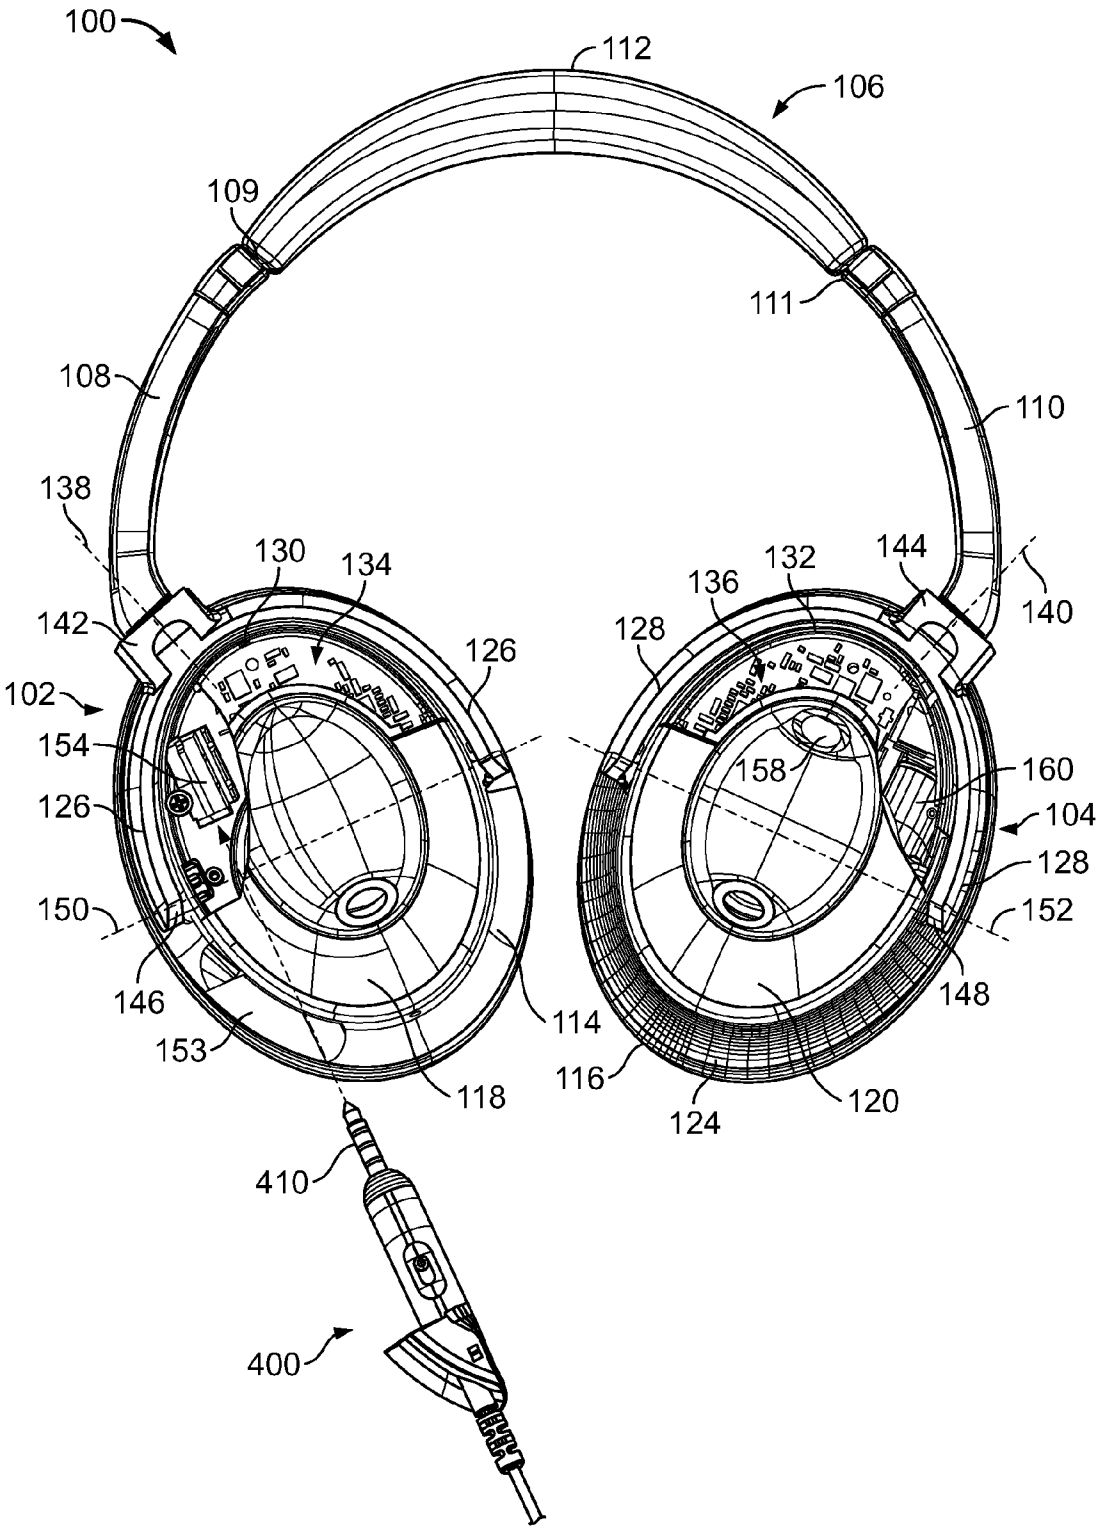
100
112
106
109
111
108
110
138
130
134
144
132
136
140
142
128
126
102
154
158
160
126
104
128
150
152
146
148
153
114
116
118
120
124
410
400

FIG. 1

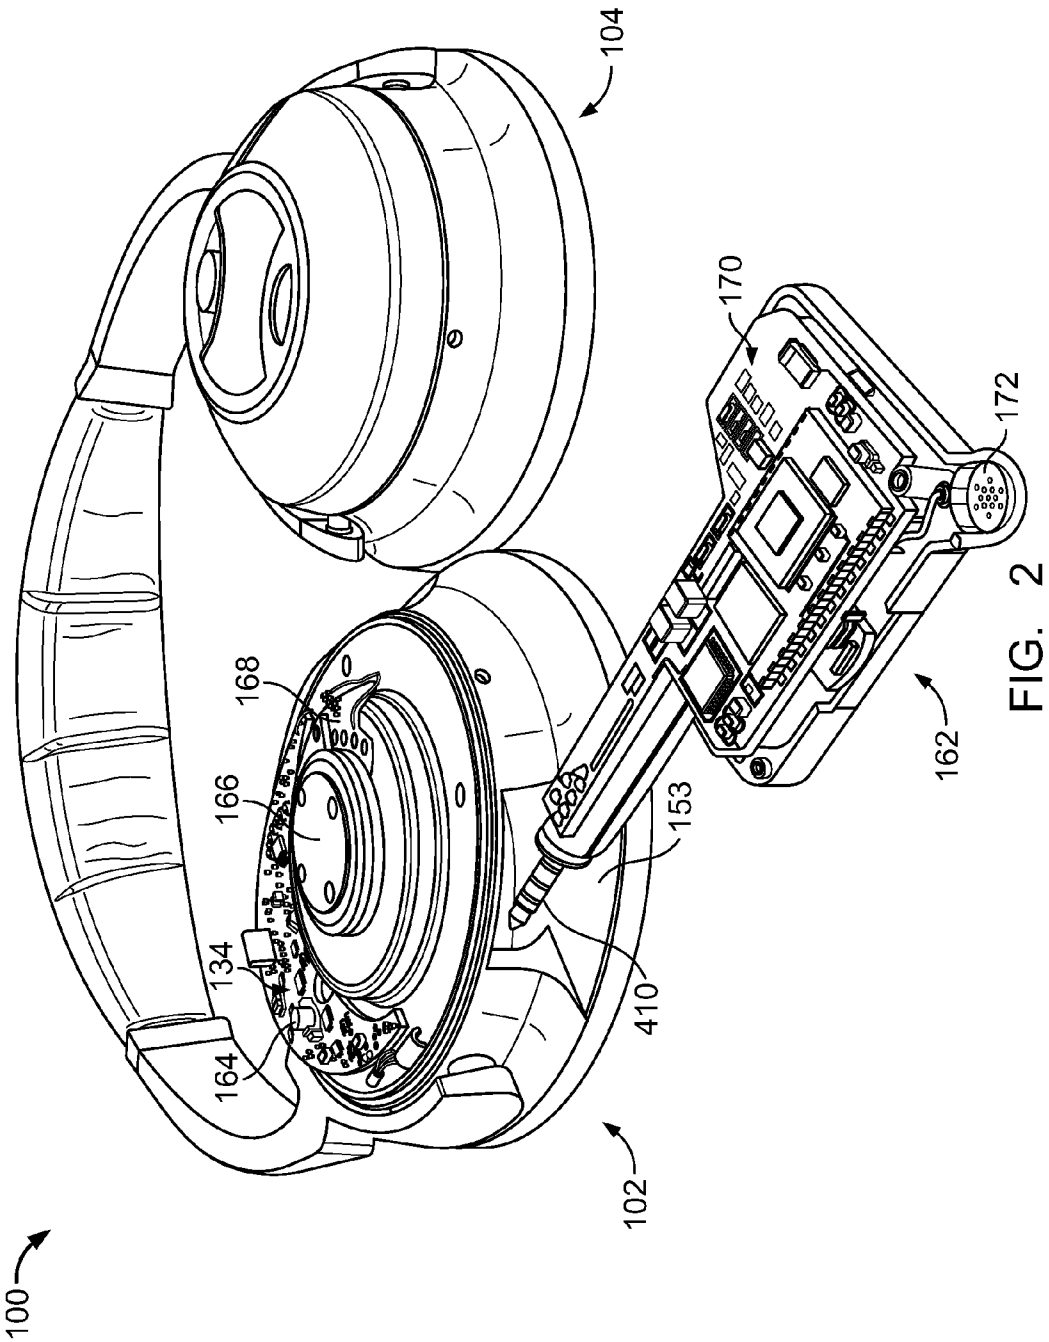

FIG. 2

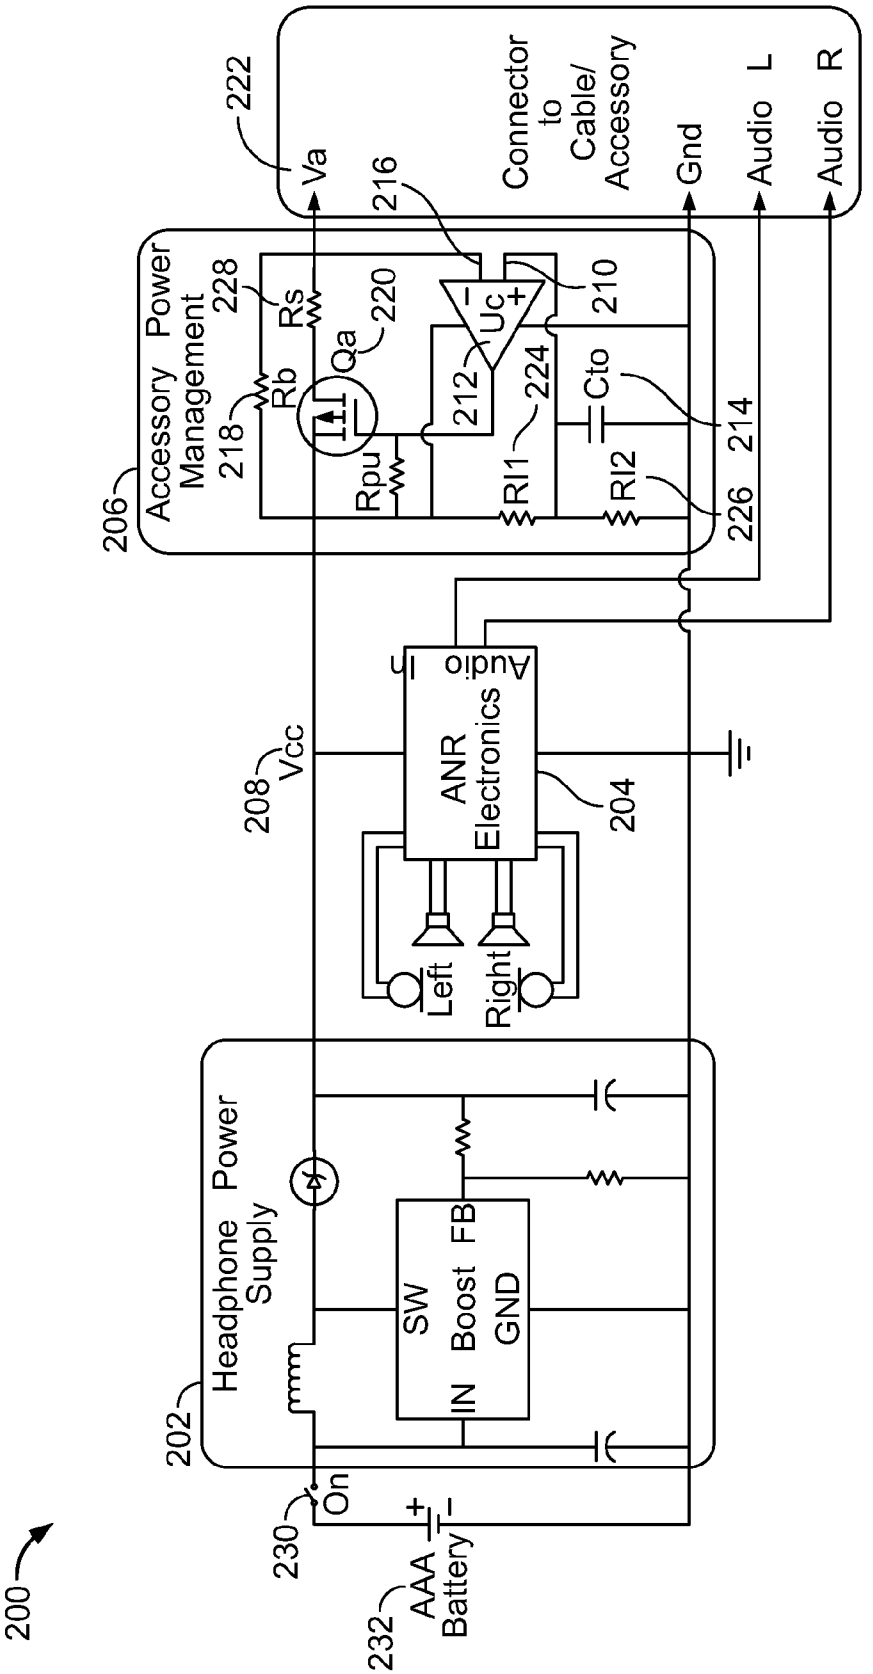
200
202
Headphone Power Supply
SW
IN
Boost
FB
GND
230
On
232
AAA Battery
+
-
208
Vcc
204
ANR Electronics
Audio In
Left
Right
206
Accessory Power Management
218
Rb
228
Rs
220
Qa
Rpu
212
Uc
210
216
224
Cto
214
Rl1
Rl2
226
222
Va
Connector to Cable/ Accessory
Gnd
Audio L
Audio R

FIG. 3

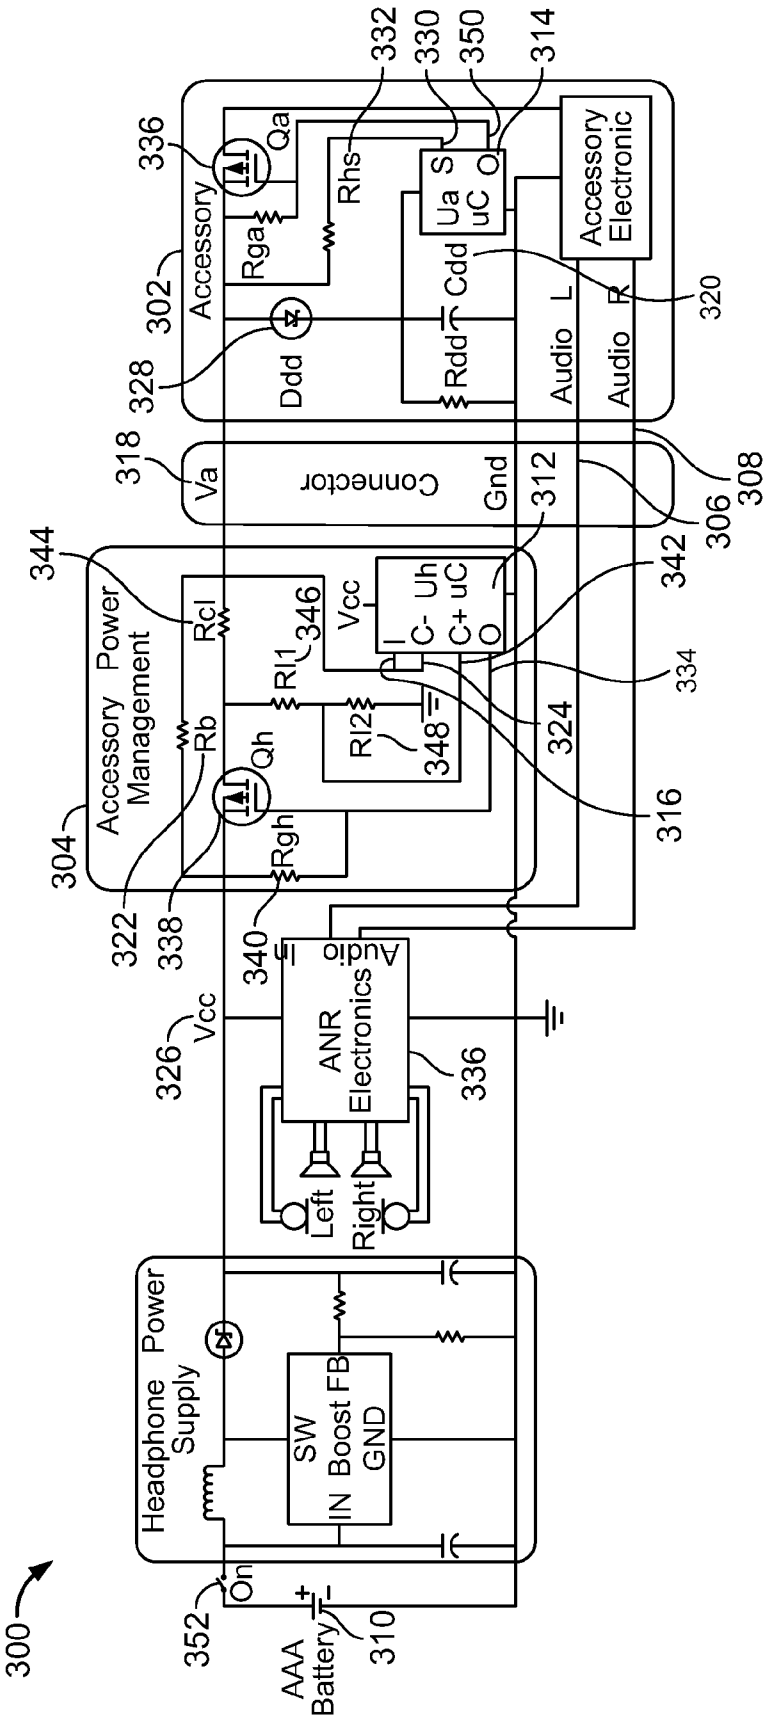
300
352
On
AAA Battery
310
Headphone Power Supply
SW
IN Boost FB
GND
Left
Right
ANR Electronics
Audio
Vcc
326
336
340
322
338
304
Accessory Power Management
Rcl
Rb
Qh
Rgh
344
Rl1
Rl2
346
348
Vcc
C- Uh
C+ uC
O
334
324
316
342
Va
Connector
Gnd
312
318
306
308
Accessory
302
328
Ddd
Rga
Qa
336
Rhs
Rdd
Cdd
Ua S
uC O
332
330
350
314
Audio L
Audio R
320
Accessory Electronic

FIG. 4

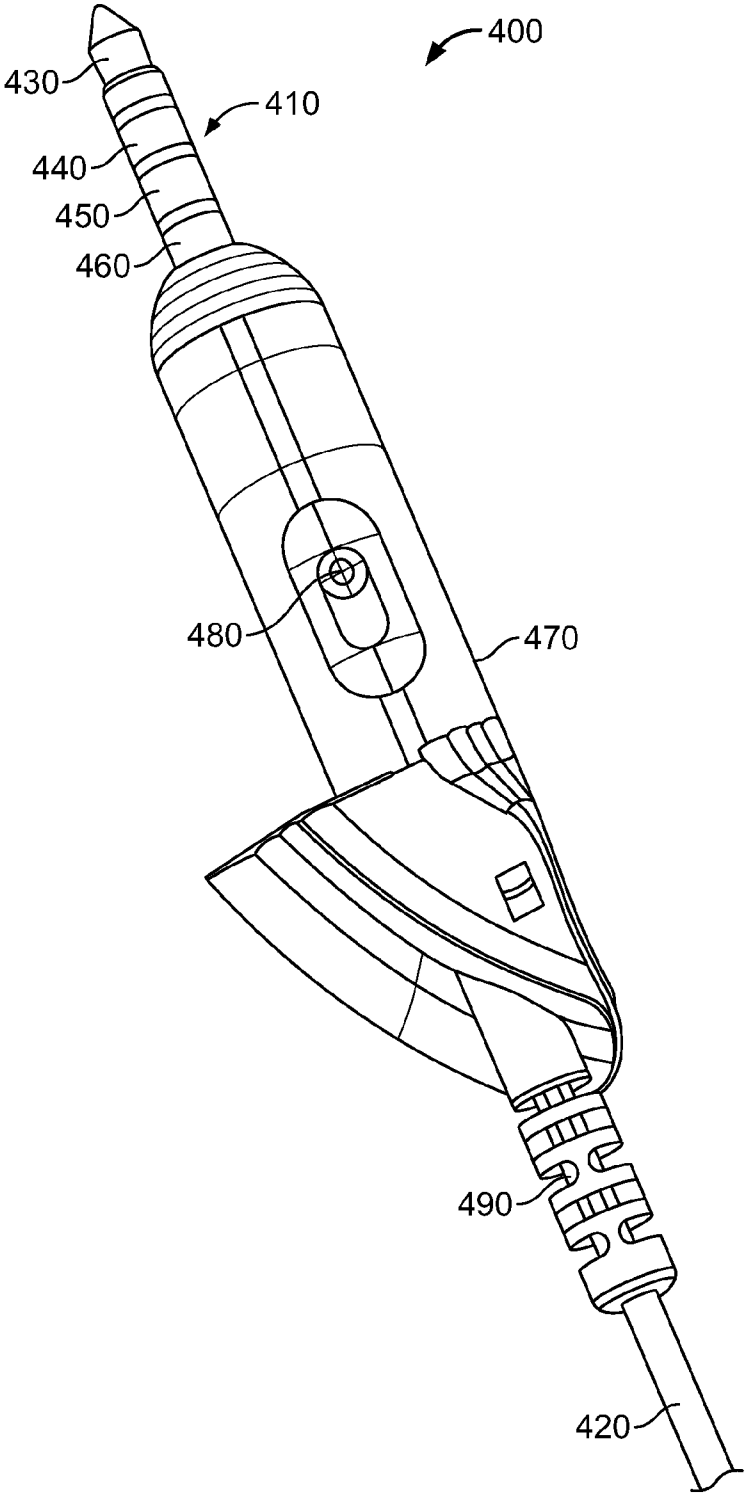

FIG. 5

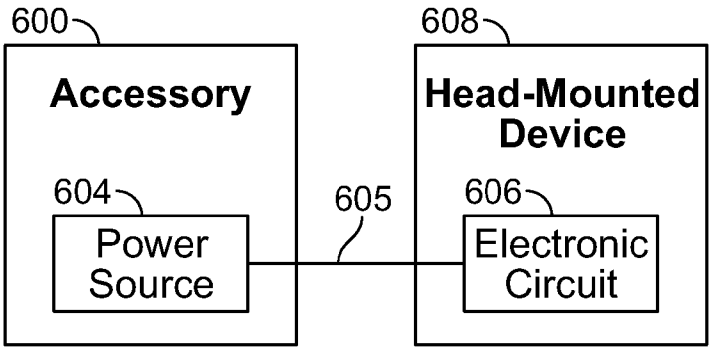
600
Accessory
604
Power Source
605
608
Head-Mounted Device
606
Electronic Circuit

FIG. 6

ELECTRONIC INTERFACING WITH A HEAD-MOUNTED DEVICE

BACKGROUND

This description relates to electronic interfacing with a head-mounted device.

Audio signals, for example, are typically carried to a headphone through a multiple-conductor cable ending in a plug that fits into a jack of a player or radio. When a microphone is added to the headphone to form a headset, the microphone signal also may be carried through the same cable to a device that uses the microphone signal, such as a telephone set or a recorder. In aviation headsets, the cable may be detachable at a jack on the headset to permit changes in the use of the headset.

The connecting cable may also be disconnected from typical noise reduction headphones when the user is using only the noise reduction feature and is not using audio from a player or radio. The circuits that are part of noise reduction headphones may be powered by batteries mounted in the headphones.

In some military communication headsets, a detachable microphone plug may both carry the microphone signal to an intercom circuit and microphone power.

Headsets that can be plugged into cell phones for hands-free use commonly use electret microphones that receive bias voltage from the cell phone's power source.

Portable music players may provide power to run electronics in peripheral devices such as transmitters to an FM radio in, for example, an automobile.

In the Universal Serial Port (USB) standard, power may be provided by a USB host or hub to a USB peripheral through a USB connector. The host and peripheral may exchange messages (using the USB standard's handshaking and power management features) regarding one another's identity and operational parameters. The messages may include how much power the peripheral will use in different operational states or the amount of memory available in the peripheral. USB headsets may be configured as peripherals in interaction with other devices.

SUMMARY

In general, in one aspect, power is delivered from a power source in a head-mounted device to a separate accessory that is coupled to the head-mounted device.

In general, in another aspect, power and signals are delivered on a common conductor that couples a head-mounted device to an accessory.

In general, in another aspect, signals are passed back and forth between a head-mounted device and an accessory that is coupled by conductors to the head-mounted device, and one or both of the head-mounted device and the accessory are configured based on the signals.

In general, in another aspect, power is received at an accessory from a head-mounted device through a power conductor, for example, a dedicated power conductor.

In general, in another aspect, an audio device to be mounted on a head comprises a transducer to deliver sound to an ear and a power source, and a conductor delivers power from the power source to an accessory coupled to the audio device.

In general, in another aspect, an audio device mounted on a head includes a transducer to deliver sound to an ear, a power source, and a signaling device, and a common conductor carries power from the audio device to an accessory and signals between the audio device and the accessory.

In general, in another aspect, an audio device to be mounted on a head includes a transducer to deliver sound to an ear, a signaling device to communicate with an accessory that is connected to the audio device, and a wired channel to carry configuration signals back and forth between the head-mounted audio device and the accessory.

In general, in another aspect, an audio device to be mounted on a head includes a transducer to deliver sound to an ear, a power source, and a dedicated power conductor to deliver power from the power source to an accessory coupled to the audio device, and a wired channel carries configuration signals back and forth between the head-mounted audio device and an accessory that is connected to the audio device.

In general, in another aspect, an accessory to be coupled to a head-mounted device has a conductor to connect to a dedicated power conductor of the device to receive power for the accessory.

In general, in another aspect, an accessory having a signaling device conducts wired communication of configuration signals with a head-mounted device.

In general, in another aspect, an accessory having a common conductor carries power and signals between the accessory and a head-mounted device.

In general, in another aspect, an accessory has a device that uses power and a conductor receives power for the device from a head-mounted device.

In general, in another aspect, power is delivered from a power source in a portable accessory to a head-mounted device that is coupled to the portable accessory and uses power for circuitry in the head-mounted device that delivers audio to a user.

Implementations may include one or more of the following features. The head-mounted device comprises at least one of a headphone and a headset. The head-mounted device comprises an audio device. The head-mounted device includes at least one of active noise reduction circuitry, amplification circuitry, or audio processing circuitry. The accessory comprises at least one of a music player, a wireless receiver, a wireless transceiver, or a radio. The device and the accessory are coupled using a detachable cable that includes the conductor. The signals comprise at least one of command, control, or management signals. The power is delivered from a source of power in the head-mounted device. The source of power comprises a battery. The accessory is peripheral to the head-mounted device. The power conductor is dedicated to delivering power.

Other advantages and features will become apparent from the following description and the claims.

DESCRIPTION

FIG. **1** is a front view of a headphone partially cutaway.

FIG. **2** is a perspective view of an accessory module and a headphone.

FIGS. **3** and **4** are schematic diagrams.

FIG. **5** is a side view of a headphone jack.

FIG. **6** is a block diagram.

As shown in the specific example of FIG. **1**, an audio headphone **100** is served by a detachable accessory cable **400** that provides an interface between the headphone and an accessory (not shown), for example, a stereo or MP3 player, a microphone for voice sensing, an aviation or helicopter interface cable, a cable connection to a USB host, or a module **162** (described below) that connects directly to the headphone **100**. The headphone **100** is an example of a head-mounted

device. A headset (which includes a microphone) is another example. The phrase head-mounted device is meant to include every possible sort of electronic device that is mounted on the head or any part of the head (for example an ear or a nose or the hair) for use by a wearer.

The detachable accessory cable **400** may allow for a functional reconfiguration of the headphone **100** for various platforms. For example, an internal battery **160** that is used to power electronics **134** and **136** (e.g., Active Noise Reduction, ANR) in the headphone **100** may also be used to power electronics in the accessory cable **400** or in the accessory to which the cable is connected.

The connection between the detachable accessory cable **400** and the headphone **100** may be through a 3.5 mm, 0.25 in, or other diameter jack plug or telephone plug **410**. Other types of connectors may be used, for example connectors similar to the parallel-contact ones commonly found on some cell phones. Power may be supplied from the headphone **100** to the accessory cable **400** by one of the four metal contacts of the plug **410**. The power provided by the headphone **100** to the electronics in the accessory cable **400** may be voltage regulated power, current regulated power, raw battery power, DC, AC, fuel cell, or solar cell, or any other power source.

In addition to providing power, the detachable accessory cable **400** may serve as a wired channel to carry control or management signals between the headphone **100** and the accessory, for example, for use in handshaking and configuration (described below).

The headphone **100** includes a left earcup **102** and a right earcup **104** connected to a headband **106** that includes a left adjustment sleeve **108** fixed to a center span **112** by a connector **109** and a right adjustment sleeve **110** connected to the center span **112** by a connector **111**. In some examples, the headband **106** may be comprised of other numbers and configurations of elements. The left adjustment sleeve **108** and the right adjustment sleeve allow the wearer to adjust the position of the left earcup **102** and the right earcup **104** relative to the center span **112** to accommodate size requirements and comfort preferences of different wearers.

Shown as a partial cutaway in FIG. **1**, the left earcup **102** includes an earcup housing **114**, an earcup cover **118**, an earcup audio seal (not shown in FIG. **1**), and an earcup angular adjustment mount **126**.

Similarly, the right earcup **104** (also shown as a partial cutaway in FIG. **1**) includes an earcup housing **116**, an earcup cover **120**, an earcup audio seal **124**, and an earcup angular adjustment mount **128**.

The earcup cover **118** is connected to the earcup housing **114** to define a left earcup chamber **130**. The earcup cover **120** is connected to the earcup housing **116** to form a right earcup chamber **132**. The left and right earcup chambers **130** and **132** contain left and right electronics **134** and **136**, respectively. In the example of FIG. **1**, the left and right electronics **134** and **136** provide and control headphone **100** functions that may include ANR, headphone power supply, and accessory power management (described below).

The left earcup **102** is rotatably connected to the left adjustment sleeve **108** by the earcup adjustment mount **126**. The earcup adjustment mount **126** may comprise one or more rotational connectors **142** and **146**. The earcup adjustment mount **126**, as shown in this example, may comprise a rotational pin **146** and a rotational connector **142**. The rotational pin **146** enables the left earcup **102** to be rotatably adjusted about an axis **150**. The rotational connector **142** enables the left earcup **102** to be rotatably adjusted about a longitudinal axis **138**.

Similarly, the right earcup **104** is rotatably connected to the right adjustment sleeve**110** by the earcup adjustment mount **128**. The earcup adjustment mount **128** may comprise one or more rotational connectors **144** and **148**. The earcup adjustment mount **128**, as shown in this example, may comprise a rotational pin **148** and a rotational connector **144**. The rotational pin **148** enables the right earcup **104** to be rotatably adjusted about an axis **152**. The rotational connector **144** enables the right earpiece **104** to be rotatably adjusted about a longitudinal axis **140**.

In FIG. **1**, the audio headphone **100** is shown in a stowage position. The left earcup **102** and the right earcup **104** have been rotated about longitudinal axes **138** and **140**, respectively. In the stowage position, the earcup cover **118** of the left earcup **102** and the earcup cover **120** of the right earcup **104** lie in a common plane.

The cutaway of the earcup cover **118** reveals an opening to an accessory insertion channel **153** for the accessory plug **410**. The cutaway of the earcup cover **118** also reveals the electronics **134** that may be contained within the left earcup chamber **130**. The electronics **134** may include a jack **154** that mates with the plug **410** of the accessory cable **400** to permit electronic interfacing with the accessory power management circuit, left earcup speaker, and the left earcup ANR electronics. Similarly, the cutaway of the earcup cover **120** reveals the electronics **136** which may be contained within the right earcup chamber **132**. The electronics **136** includes an ANR enable switch **158**, the battery **160** for the headphone power supply, the headphone power supply circuit, the right earcup speaker, and the right earcup ANR electronics.

Referring to FIG. **2**, an example accessory module **162** connects directly through the accessory insertion channel **153** using an accessory plug **410** mounted on the accessory module **162**, rather than using a cable. The earcup cover **118** of the left earcup **102** has been removed to reveal the electronics **134** mounted within the left earcup chamber **130**. The electronics **134** revealed by the removal of the earcup cover **118** may include the accessory power management electronics **164**, left earcup speaker **166**, and the left earcup ANR electronics **168**.

The example accessory module **162** includes electronics **170** that provide the wearer with a hands-free wireless (e.g., Bluetooth) connection to a cell phone (not shown). The accessory module **162** also may include a microphone **172** that may pick up the sound of a wearer's voice. The accessory module **162** and the microphone **172** receive power from the headphone battery **160**. In some implementations, the accessory module may include electronics **170** that, for example, provide the wearer with a wireless connection to a stereo or MP3 player audio source, an aviation or helicopter interface, a USB host, or the like.

The detachable module **162** may allow for a functional reconfiguration of the headphone **100** for use on a variety of platforms. For example, the headphone **100** may contain an internal battery (not shown) to power the ANR electronics **168** in the headphone **100**. The internal battery may be used to power electronics in the accessory module **162** that may interface with the headphone **100**. The power may be supplied from the headphone **100** to the accessory module **162** by one of the contacts on the plug **410**. The power provided by the headphone battery **160** to the electronics **170** in the accessory module **162** may be raw battery power, power that is voltage or current regulated by the accessory power management electronics **164** (discussed in FIGS. **3** and **4**), or any other power source.

Some implementations may include signaling capabilities between the headphone **100** and the accessory module **162**.

The signaling capabilities may be used for a wide variety of purposes and functions, including handshaking, power supply configuration, or signal configuration between the headphone **100** and the accessory module **162**.

As shown in FIG. **3**, an example circuit **200** that may be mounted in the headphone includes a boost converter **202** to power the ANR headphone electronics **204** and an accessory power management circuit **206**. Circuit **200** is a portion of headphone right earcup electronics **136** or alternatively a part of left earcup electronics **134** or in some other location in the headphone. The accessory power management circuit **206** may turn off the power supply to the accessory (e.g., **400** and **162**) if the current drawn by the accessory (e.g., **400** and **162**) exceeds a maximum predetermined supply threshold.

The operation of the accessory power management circuit **206** is as follows. When the headphone **100** is first turned on using switch **230**, Vcc **208** increases to a nominal value of 2.8 Vdc because of the action of boost circuit **202**. The +input pin **210** of comparator Uc **212** is held to a low voltage as capacitor Cto **214** charges. The –input pin **216** of comparator Uc **212** is held to a higher voltage through Rb **218** so the comparator Uc **212** will initially pull its output low, turning on MOSFET Qa **220**. MOSFET Qa **220** provides power Va **222** to the accessory (e.g., **400** and **162**). The time constant which is approximately R**11***Cto (items **224** and **214**), since R**12** is normally much greater than R**11** may be chosen so that Qa **220** may be held on by +input pin **210** of comparator Uc **212** being held to a low enough voltage for the duration of any initially high turn-on current spikes drawn by the accessory (e.g., **400** and **162**).

Subsequently, if the current drawn from Va **222** by the accessory (e.g., **400** and **162**) exceeds a predetermined value such that the voltage drop across the sense resistor Rs **228** exceeds the drop across R**11** **224** in the R**11**/R**12** **224**/**226** divider, then comparator Uc **212** output will go to logic high level, Qa **220** will turn off, and Va **222** will fall to essentially zero, latching the accessory (e.g., **400** and **162**) power off. The wearer would need to turn the headphone **100** power off and back on using the switch **230** in order to once again provide power to the accessory (e.g., **400** and **162**). This example is just one possible implementation.

Some implementations of the accessory power management circuit **206** may include replacing the accessory power management circuit **206**, as shown in FIG. **3**, with no power management. In such examples, Va **222** may be directly connected to Vcc **208** and current limiting in the power supply **202** may be desirable. Possible current limiting implementations may include a resistor, a circuit, or a device that clamps the current to a maximum value (e.g., a Junction Field Effect Transistor (JFET) connected to limit current to its saturation value Idss). Another example may include a voltage regulator (either switching or linear) to regulate Vcc **208** to the Va **222** required by the cable or module accessories **400** and **162**. In some implementations for power management, the headphone power supply **202** may also be a raw voltage or a higher voltage (e.g., lithium polymer) from a battery **232** and a buck converter to create the Vcc **208** that the headphone **100** requires.

Referring to FIG. **4**, in some examples of the circuit **300** power management and signaling electronics **304** enable signaling between the headphone **100** and the powered accessory device **302** on a conductor shared with voltage Va **318** provided to the accessory **302**. For example, the circuit **300** may enable electrical handshaking and configuration signaling between the headphone **100** and the powered accessory device **302**. The electronics **304** could replace the power management circuitry **206** with circuitry to implement an exemplary handshaking and configuration protocol between the headphone **100** and accessory **302** while also managing power flow. The protocol may allow the accessory **302** to pass a binary or integer value N to the headphone **100** upon power-up. This value N may be used to identify whether the accessory **302** is compatible for use with that headphone **100** or to configure the headphone **100** in some fashion.

Examples of headphone **100** configurations may include presenting a 32 ohm load through a cable connection accessory cable **400** to a typical audio source (e.g., home stereo) to emulate traditional passive consumer headphones. Another example may include switching the left and right inputs **306** and **308** of the headphone **100** to a high impedance state when connected to a wireless accessory module **162** to minimize power consumption and draw on the battery **310**.

In such examples, the circuit includes two microcontrollers **312** and **314**. The microcontroller Uh **312** is part of the headphone electronics **134**. The microcontroller Ua **314** is part of the accessory **302** electronics. The two microcontrollers **312** and **314** may be Microchip Technology Inc. PIC-10F integrated circuits. Some implementations may use more sophisticated controllers that may already be present in the electronics of either the headphone **100** or the accessory **302** to accomplish similar or additional functions. The microcontrollers **312** and **314** may have code that may be flashed into memory to allow the implementation of the following handshaking and configuration protocol: while the headphone **100** power switch **352** is turned to the on position, the microcontroller Uh **312** checks input I **316** periodically (typically every 10 milliseconds) to see if the voltage Va **318** is low. This is to detect the mating (or presence upon power up) of an accessory **302**.

When an accessory **302** is mated, the capacitor Cdd **320** (typically 10 uF) charges through the resistor Rb **322** (typically 2 Kohm) until the voltage is high enough for the microcontroller Ua **314** to be enabled. The microcontroller Ua **314** then waits several time constants Rb*Cdd **322** and **320**, allowing Ua's **314** supply input feed by the voltage of Cdd to approach Vcc **326** less the drop across the Schottky diode Ddd **328**, before pulling the output S **330** to a logic low level. S **330** is held at a logic low level long enough (typically 15 milliseconds) for the microcontroller Uh **312** to detect the presence of accessory **302**. Rhs **332** is of a small enough value to ensure that Va **318** is pulled below a predetermined threshold of microcontroller Uh **312** input I **316**. At wake-up, and during all handshaking, microcontroller Ua **314** pin O **350** is held high to keep MOSFET Qa **336** off, preventing the accessory **302** from operating. After having held output S **330** to a logic low level for 15 milliseconds (typically), microcontroller Ua **314** then releases S **330** to allow Cdd **320** to recharge to ensure sufficient voltage to keep powering microcontroller Ua **314** (typically 40 milliseconds). When microcontroller Uh **312** detects that input I **316** (voltage Va **318**) has returned to a logic high state it begins checking pin I **316** much more often (i.e., every 100 microseconds). This begins the accessory handshake sequence. After Cdd **320** recharges, the microcontroller Ua **314** pulls S **330** to a logic low level for 150 microseconds (typically), ensuring that the microcontroller Uh **312** detects that the input I **316** (voltage Va **318**) is at a logic low level. When the microcontroller Uh **312** detects Va **318** is at a logic low level it zeros a handshake register. The microcontroller Uh **312** continues checking the state of input I **316** every 100 microseconds. Every fourth check (i.e., every 400 microseconds) the value in the handshake register is incremented by one.

After the first 150 microsecond (typically) strobe of pin S **330**, the microcontroller Ua **314** waits some multiple N of 400

microseconds to strobe output S **330** low for another 150 microsecond (typically) interval. The value of N is the information the accessory **302** wishes to pass to the headphone **100** during the handshaking process. When the microcontroller Uh **312** detects that the microcontroller Ua **314** has pulled Va low a second time, the 100-microsecond checking cycle and the handshaking process is complete with the handshake register now containing the value N passed from the accessory **302**. In the circuit **300**, as shown, N is compared against a stored list in the headphone **100** to determine if the accessory is compatible. If the accessory is compatible, the microcontroller Uh **312** pulls output O **334** low turning on the MOSFET Qh **338** to provide power to the accessory **302**. The gate of Qh **338** has been held to a logic high level by a pull-up resistor Rgh **340**. The output O **334** could also be passed to the ANR electronics **336** to accomplish some other configuration, such as the impedance matching mentioned earlier.

Meanwhile, after the second handshake-completing strobe of pin S **330**, the microcontroller Ua **314** waits for the microcontroller Uh **312** to complete the handshake process and configure the headphone **100**. It then pulls the output O **350** low, turning on the MOSFET Qa **336**, providing power to the accessory **302** electronics. After the microcontroller Uh **314** turns on Qh **338**, the microcontroller Uh **312** then begins monitoring comparator inputs C+ **342** and C− **324**. If C− **324** falls below the value at C+ **342**, the accessory **302** has drawn current exceeding the designed limit and transistor Qh **338** is turned off by microcontroller Uh **312** output O **334**. The current limit is determined by current sense resistor Rcl **344** (typically 1 ohm) and limit setting resistors R11 **346** and R12 **348**.

Referring to FIG. **5**, the body **470** of the accessory plug **410** may contain embedded or in-line electronics to perform various functions, such as audio and voice level control or passive configuration to an accessory. The body **470**, as shown, may also contain a switch **480** that may be configured for use as an on/off power switch, an audio attenuation switch, a mute switch, or the like. Alternatively, body **470** may be enlarged as shown in FIG. **2** to house all accessory electronics.

The plug **410** may mate with the jack **154** through the accessory insertion channel **153** in the headphone **100**. The accessory plug **410** may contain a strain relief **490** and be coupled to a single, dual, or multiple conductor cable **420** connection to an accessory. The cable **420** and plug **410** may provide the headphone **100** with the physical ability to interface with, for example, an audio output from a stereo or MP3 player, a hands-free connection to a cell phone (wired or wireless), a microphone for voice sensing, an aviation or helicopter, a connection to a USB host, or the like. For this purpose the other end of the cable may be fitted with a plug, a socket, or another kind of connector or be wired directly to the accessory. Or as previously described, the accessory can be attached directly to the plug without the use of any cable.

The plug **410** of the accessory cable **400** comprises four separate contacts that allow the headphone to connect to the accessories. The contacts may, in this example be configured to serve a power circuit **430**, a left audio channel **440**, a right audio channel **450**, and a common or ground circuit **460**. In some implementations, the power circuit **430** may be configured as a handshaking, configuration control, or communication interface line (e.g., Va **318**, as described above) between the headphone **100** and the accessory. Conductors in the cable are connected respectively to each of the contacts.

In some implementations, one or more of the contacts and cable conductors can be dedicated to and carry only power, one or more others may be dedicated to and carry only audio signals, one or more others may be dedicated to carry only control, management, or command signals, or one or more contacts and cable conductors may carry any combination of power, audio signals, and control/command/management signals by appropriate multiplexing techniques. In some implementations, connectors other than a coaxial multi-contact phone plug may be used to connect the headphone to the accessory. In some implementations, the cable is permanently attached to the head-mounted device, and accessories are connected to the free end of the cable.

In some implementations, for example, as shown in FIG. **6**, an accessory **600** such as a portable music player, radio, cell phone, or other audio communication device may have its own internal power source **604**, and the power from that source may be carried by a conductor **605** to power electronic circuits **606** involved in providing audio to a user within a head-mounted device **608**, for example, an ANR circuitry, amplification circuitry or other audio processing circuitry in a headphone.

Other embodiments are also within the scope of the following claims.

What is claimed is:

1. A method comprising

detecting a coupling of a head-mounted device to a separate accessory,

determining if the separate accessory is compatible with the head-mounted device by communicating a configuration protocol between the head-mounted device and the separate accessory that passes at least one of a binary or integer preset value from the separate accessory to the head-mounted device, and if the separate accessory is determined to be compatible based upon the preset value, delivering power from a power source in the head-mounted device to the separate accessory that is coupled to the head-mounted device,

passing signals back and forth between the head-mounted device and the accessory, and

configuring one or both of the head-mounted device and the accessory based on the signals.

2. The method of claim **1** in which the head-mounted device comprises at least one of a headphone and a headset.

3. The method of claim **1** in which the head-mounted device comprises an audio device.

4. The method of claim **1** in which the accessory comprises at least one of a music player, a wireless receiver, a wireless transceiver or a radio.

5. The method of claim **1** in which the device and the accessory are coupled using a detachable cable.

6. The method of claim **1** also comprising delivering power and signals on a common conductor that couples the head-mounted device to the accessory.

7. An apparatus comprising

an audio device to be mounted on a head of a user and comprising a transducer to deliver sound to an ear and a power source,

a circuit to determine if a separate accessory adapted to couple to the audio device is compatible with the audio device by communicating a configuration protocol between the audio device and the separate accessory that passes at least one of a binary or integer preset value from the separate accessory to the audio device,

a conductor to deliver power from the power source to a separate accessory coupled to the audio device if the circuit determines that the separate accessory is compatible with the audio device based upon the preset value,

a signaling device to communicate with an accessory that is connected to the audio device, and

a wired channel to carry configuration signals back and forth between the audio device and the separate accessory.

8. The apparatus of claim **7** in which the head-mounted device comprises at least one of a headphone and a headset.

9. The apparatus of claim **7** in which the head-mounted device comprises an audio device.

10. The apparatus of claim **7** in which the power is delivered from a source of power in the head-mounted device.

11. The apparatus of claim **10** in which the source of power comprises a battery.

12. The apparatus of claim **7** in which the accessory comprises at least one of a music player, a wireless receiver, a wireless transceiver, or a radio.

13. The apparatus of claim **7** in which the device and the accessory are coupled using a detachable cable that includes the conductor.

14. The apparatus of claim **7** in which the conductor is dedicated to delivering power.

15. The apparatus of claim **7** in which the accessory is peripheral to the head-mounted device.

16. The apparatus of claim **7** also including

a signaling device to communicate with an accessory that is connected to the audio device, and

a common conductor to carry power from the audio device to the separate accessory to carry signals between the audio device and the accessory.

17. The apparatus of claim **7** in which the signals comprise at least one of command, control, or management signals.

18. An apparatus comprising

an accessory to be coupled to a head-mounted device, the accessory having a conductor to connect to a power conductor of the device to receive power for the accessory,

a circuit to determine if the accessory is compatible with the audio device by communicating a configuration protocol between the head-mounted device and the accessory that passes at least one of a binary or integer preset value from the accessory to the head-mounted device, and if the accessory is compatible with the audio device based upon the preset value, to provide power to the accessory on the conductor, and

the accessory comprises a signaling device to conduct wired communication of configuration signals with the head-mounted device.

19. The apparatus of claim **18** in which the head-mounted device comprises at least one of a headphone and a headset.

20. The apparatus of claim **18** in which the head-mounted device comprises an audio device.

21. The apparatus of claim **18** in which power is delivered from a source of power in the head-mounted device to the accessory.

22. The apparatus of claim **21** in which the source of power comprises a battery.

23. The apparatus of claim **18** in which the accessory is peripheral to the head-mounted device.

24. The apparatus of claim **18** in which the accessory comprises at least one of a music player, a wireless receiver, a wireless transceiver, or a radio.

25. The apparatus of claim **18** in which the device and the accessory are coupled using a detachable cable that includes the conductor.

26. The apparatus of claim **18** in which

the accessory comprises a common conductor that carries power and signals between the accessory and the head-mounted device.

27. The apparatus of claim **18** in which

the accessory comprises a device that uses power and a conductor to receive power for the device from a head-mounted device.

28. A method comprising

detecting a coupling of a head-mounted device to a portable accessory,

determining if the separate accessory is compatible with the head-mounted device by communicating a configuration protocol between the head-mounted device and the separate accessory that passes at least one of a binary or integer preset value from the separate accessory to the head-mounted device, and if the separate accessory is determined to be compatible based upon the preset value, delivering power from a power source in the portable accessory to the head-mounted device that is coupled to the portable accessory and uses the power for circuitry in the head-mounted device that delivers audio to a user,

passing signals back and forth between the accessory and the head-mounted device, and

configuring one or both of the accessory and the head-mounted device based on the signal.

29. A method comprising

detecting a coupling of a head-mounted device to a separate accessory,

determining if the separate accessory is compatible with the head-mounted device when the accessory is coupled to the head mounted device by communicating a configuration protocol between the head-mounted device and the separate accessory that passes at least one of a binary or integer preset value from the separate accessory to the head-mounted device, and if the separate accessory is determined to be compatible based upon the preset value, delivering power from a power source in the head-mounted device to the separate accessory that is coupled to the head-mounted device,

wherein the head-mounted device includes active noise reduction circuitry.

30. The apparatus of claim **29** in which the power is from a battery of the head-mounted device.

31. The apparatus of claim **29** in which the accessory is one of wireless transceiver, cell phone or communication device.

32. The method of claim **28** in which the signals comprise an identifier for that accessory.

33. The method of claim **32** in which the identifier is used to determine accessory compatibility.

34. The apparatus of claim **18** in which the signals comprise an identifier for the accessory.

35. The apparatus of claim **34** in which the identifier is used to determine accessory compatibility.

36. The method of claim **1** in which the signals comprise an input impedance setting for the head-mounted device.

37. The method of claim **1** in which the accessory comprises a signaling device to set the head-mounted device input impedance.

38. The apparatus of claim **18** in which the signals comprise an input impedance setting for the head-mounted device.

39. The apparatus of claim **18** in which the signaling device is configured to set the head-mounted device input impedance.

* * * * *